







# OWNERS MANUAL


MOUNTAIN TOP® EVO ROLL COVER

## 1



## WARNINGS

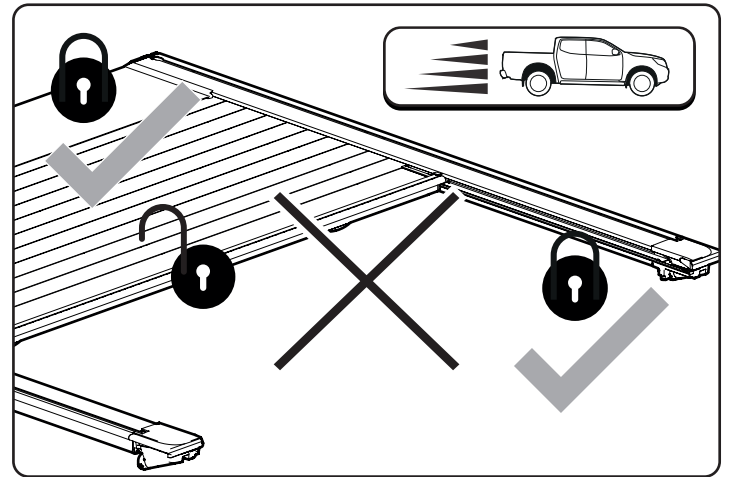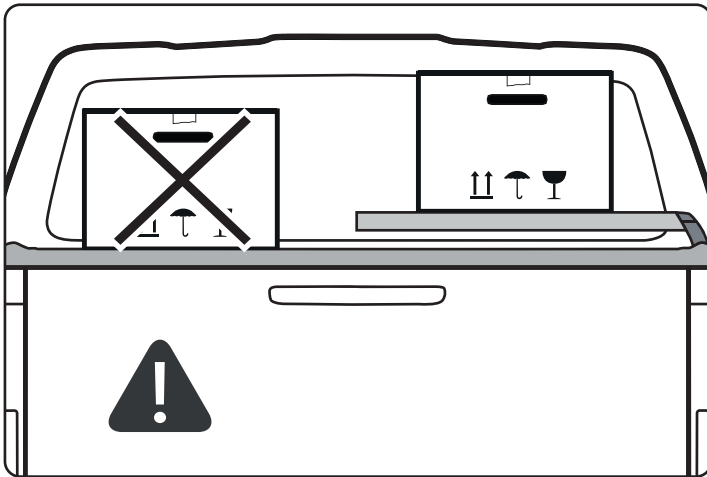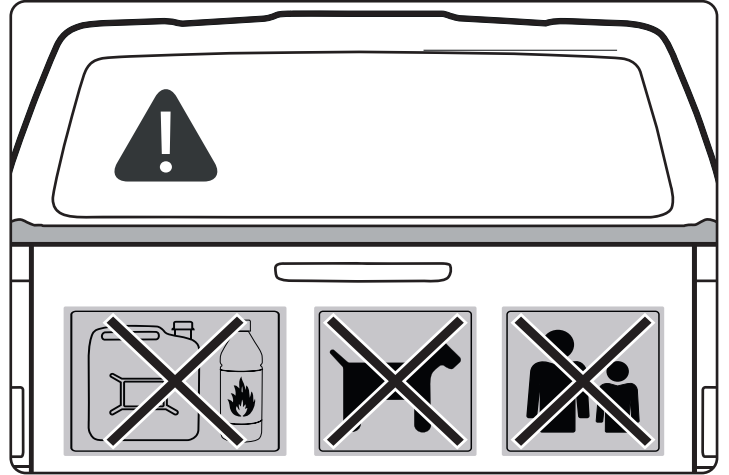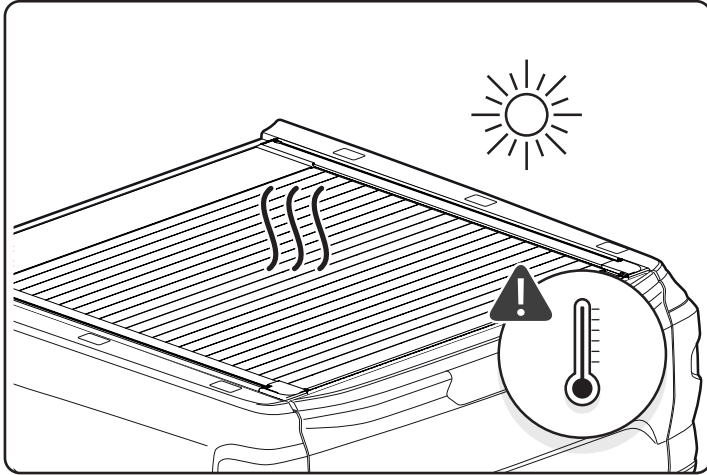


- Temperatures can be very high under the cover when closed.
- We do not recommend washing the EVO roll cover in a brushless carwash, as the coating may be damaged due to use of chemicals.

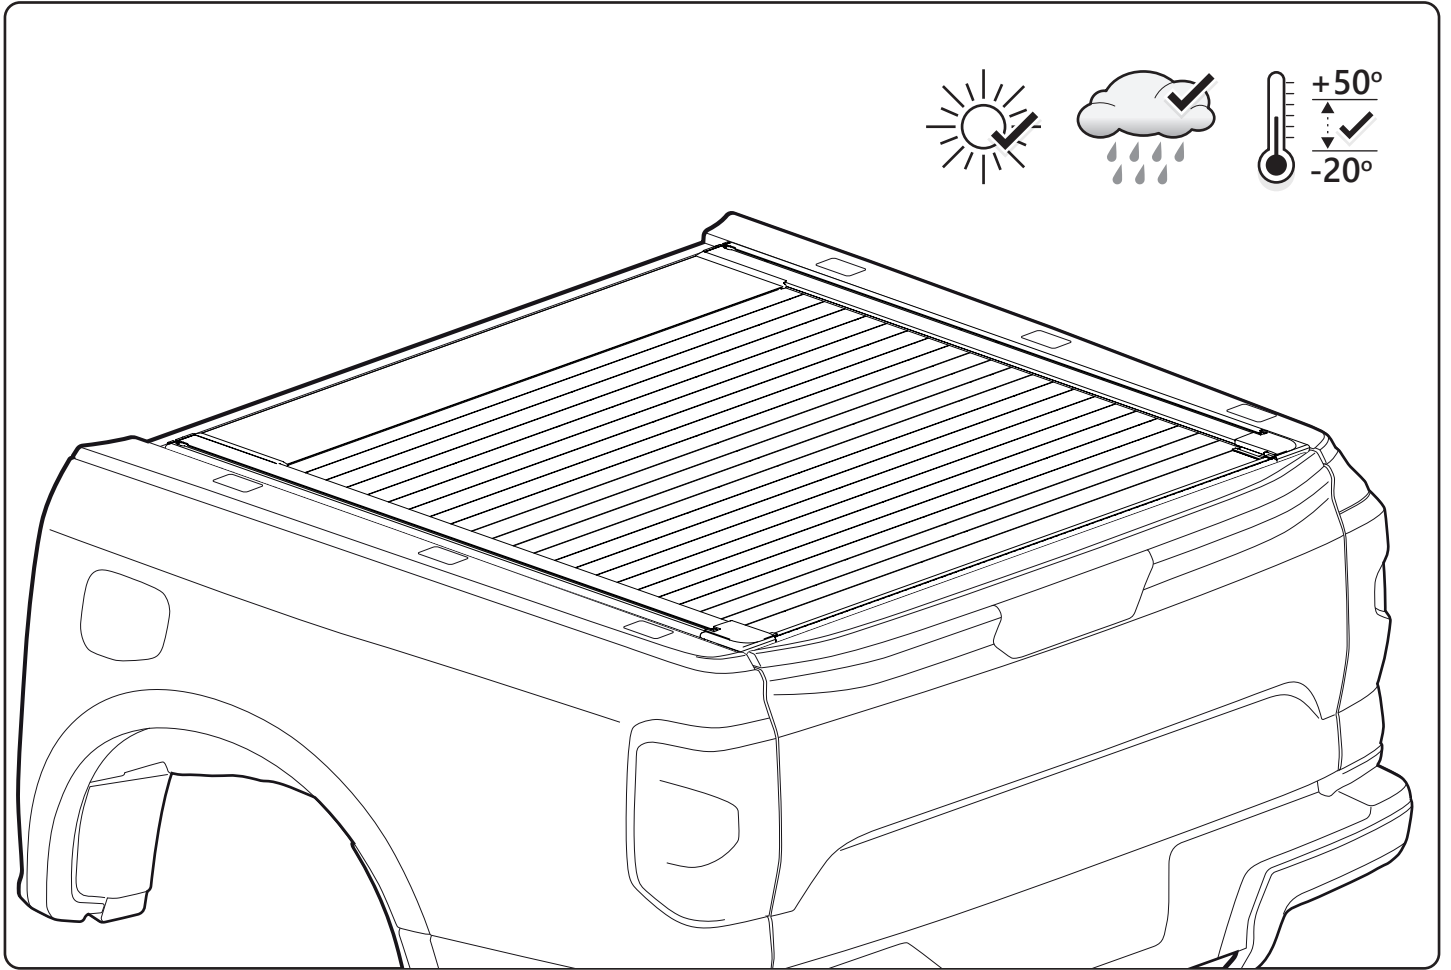

- The Mountain Top EVO roll cover design is lightweight and not suitable for extreme usage.
- Designed to withstand rain water, some water ingress may occur.
- Dust can enter the compartment through various gaps.
- Due to profiles which relatively quick heats up and cools down according to weath conditions can cause condensation on the inside.
- The EVO roll cover is not designed for loading although it can support normal snow loads.
- Goods in the bed must be secured during transportation to prevent damage.

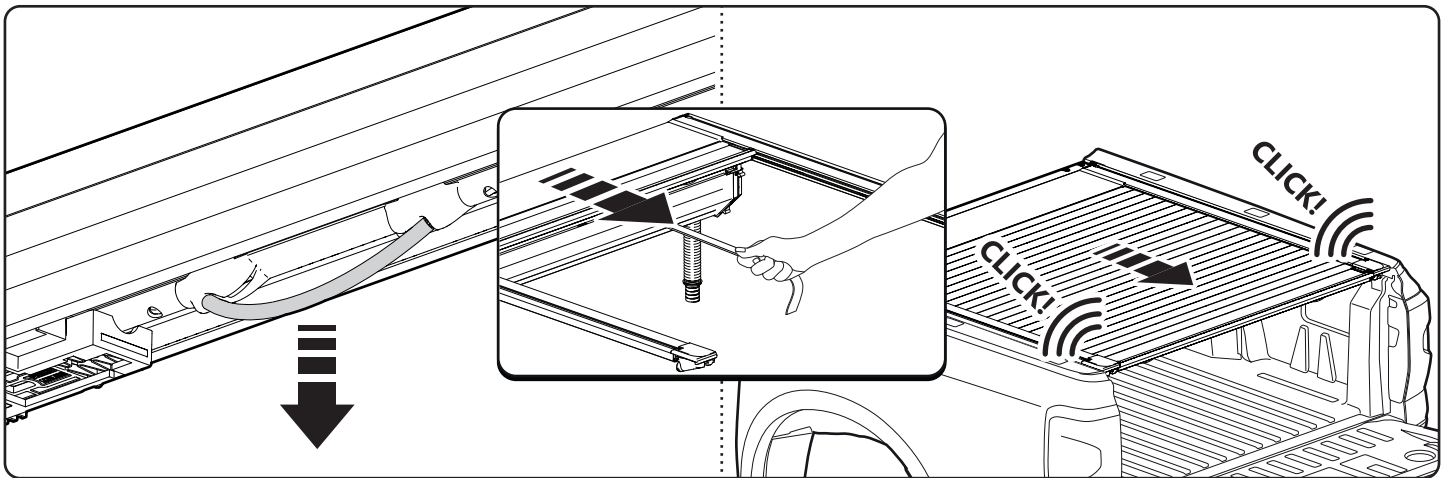
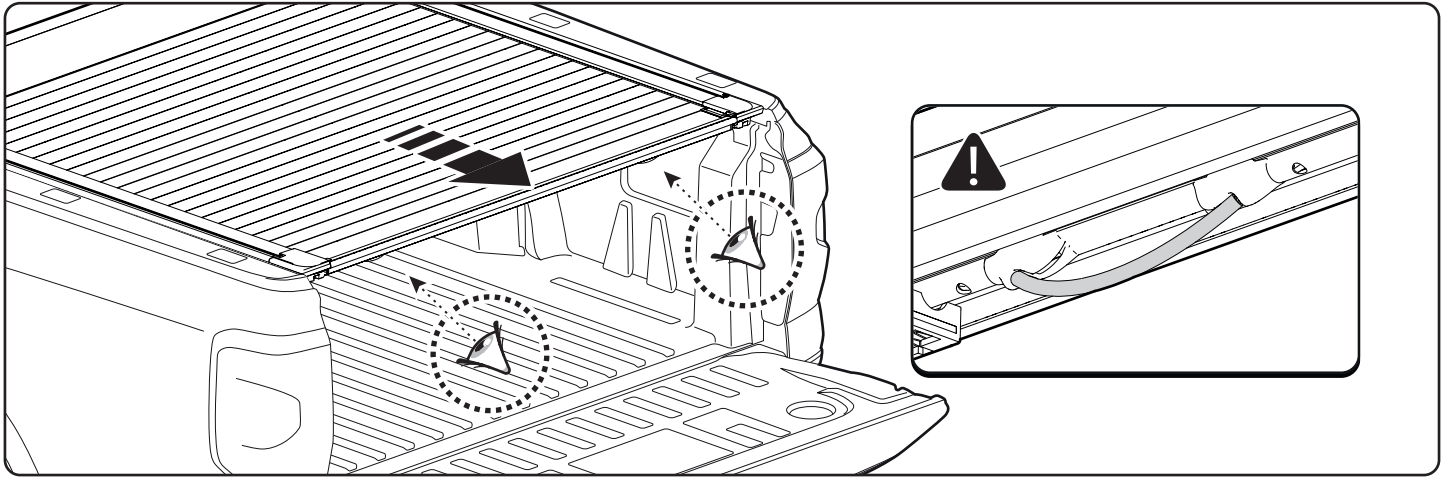


- Close

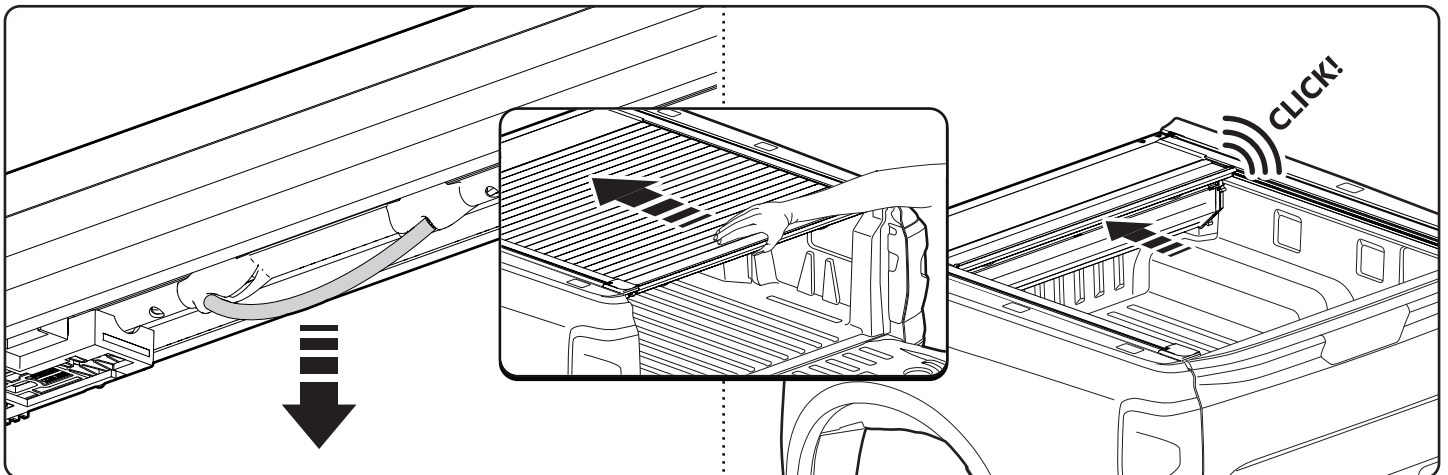


- Open


- When the EVOm roll cover is fully opened, a lock activator is automatically triggered, engaging the locking system.
- For the EVOm roll cover to close correctly, the locking system must be engaged before the cover is closed.

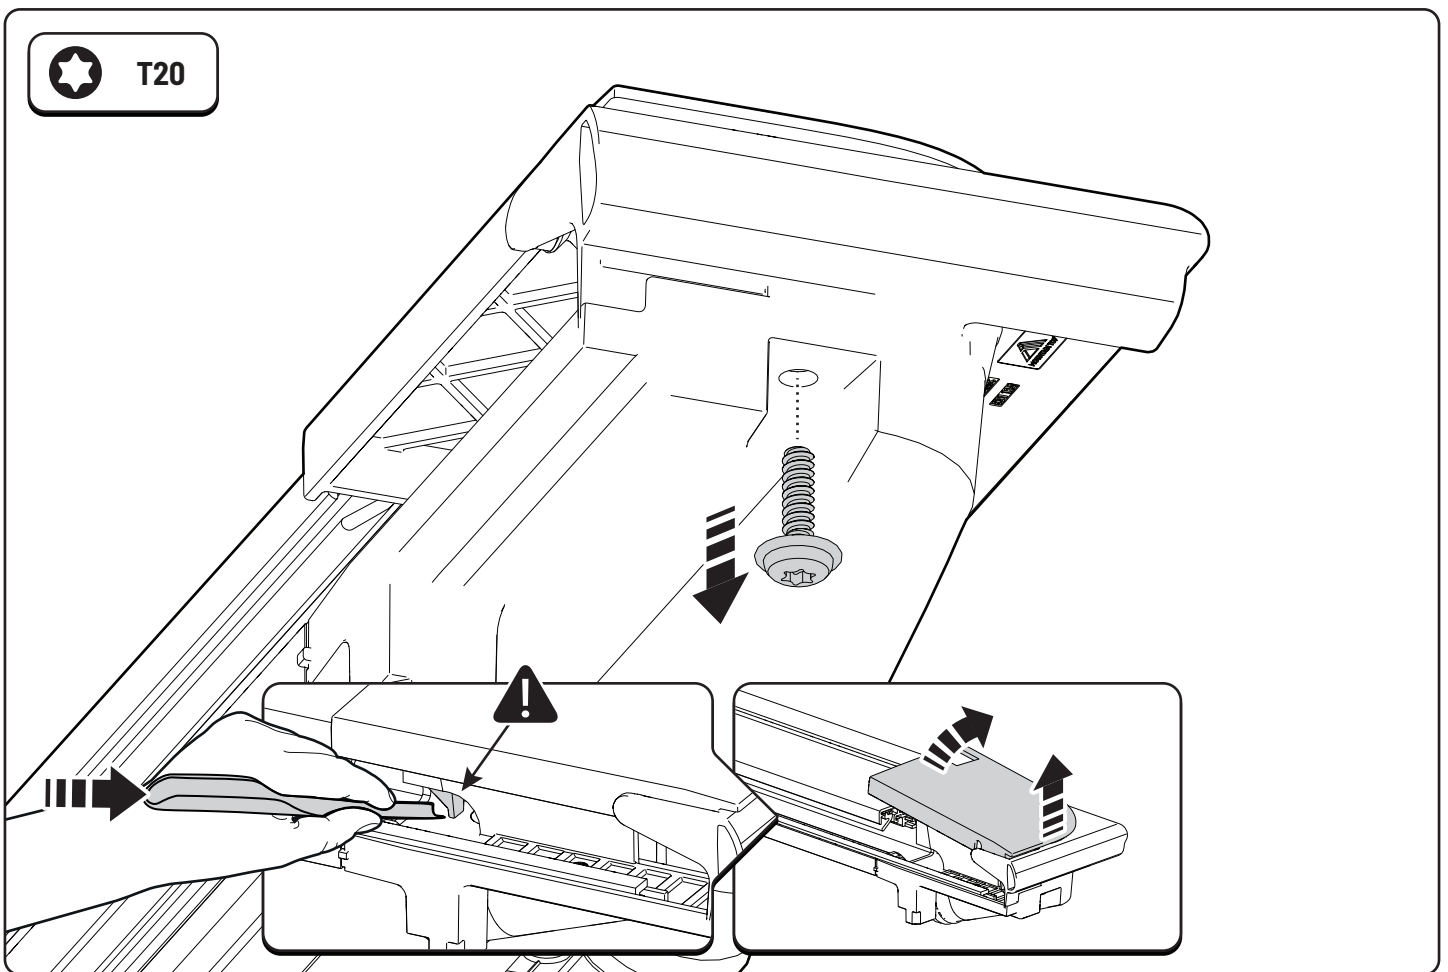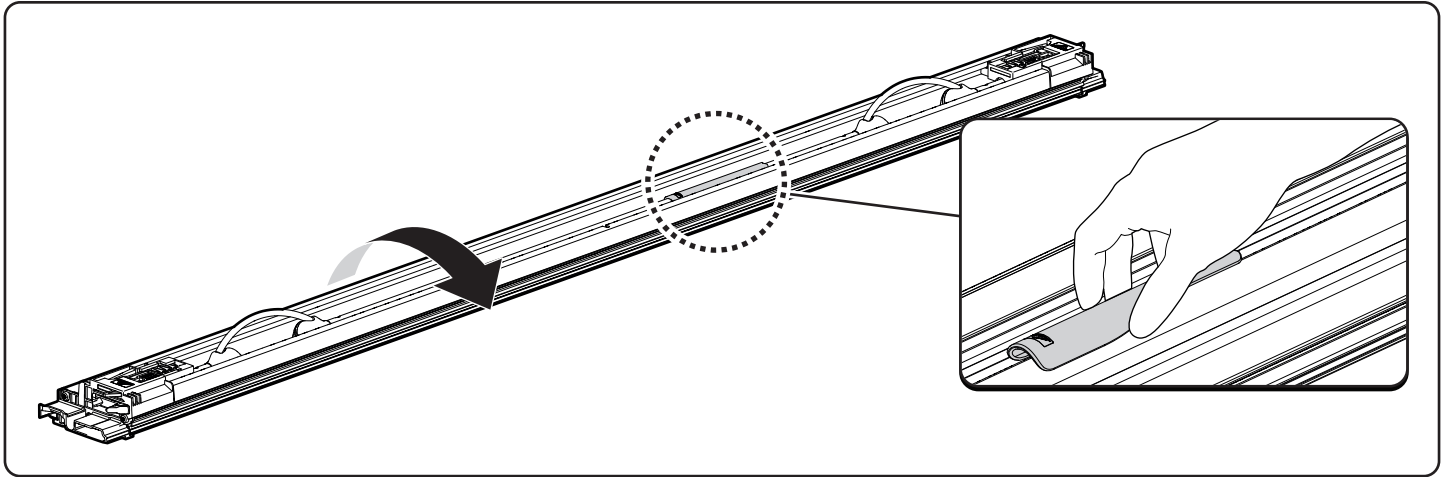


- Loosen screw and place to the side.
- Use the multi tool to remove the plastic covers on the side profiles.

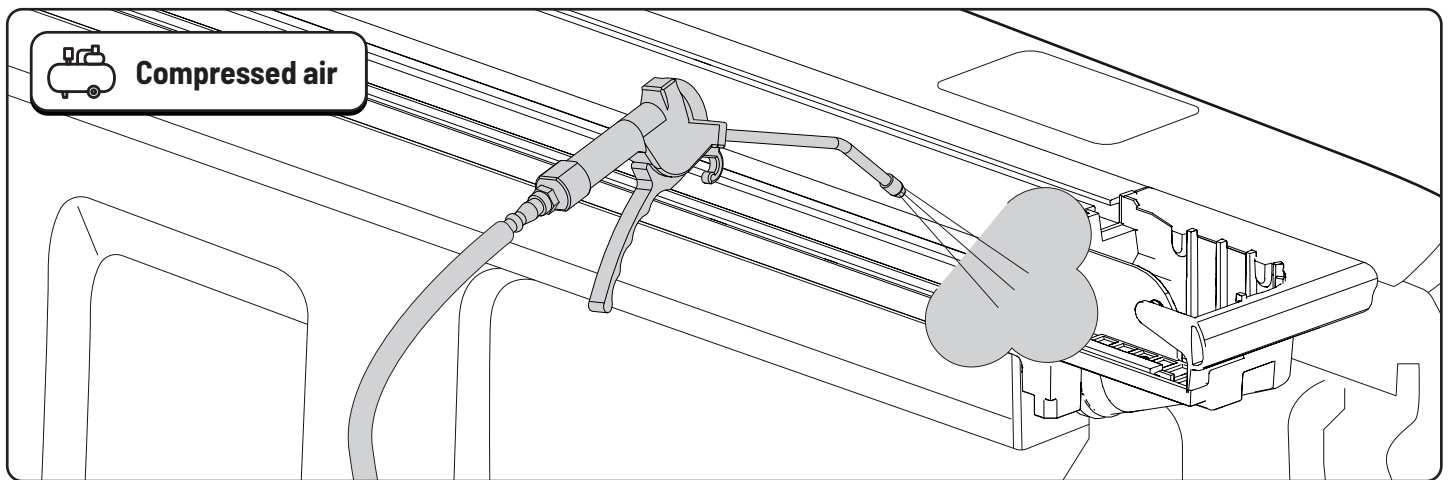


- Remove dirt and debris using compressed air.

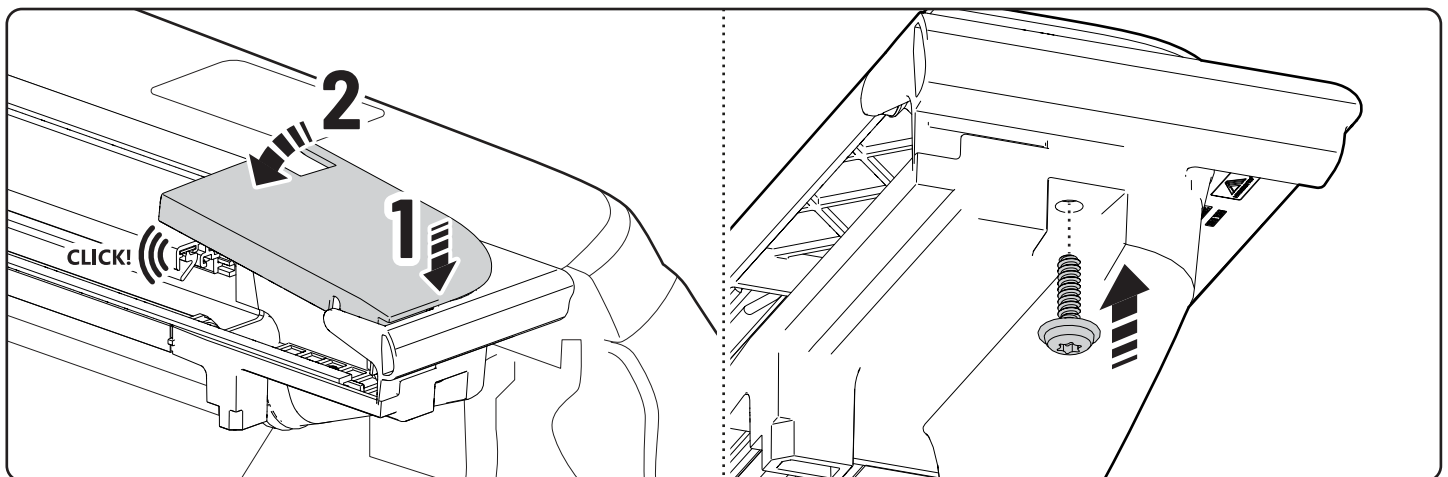


- Mount plastic covers.

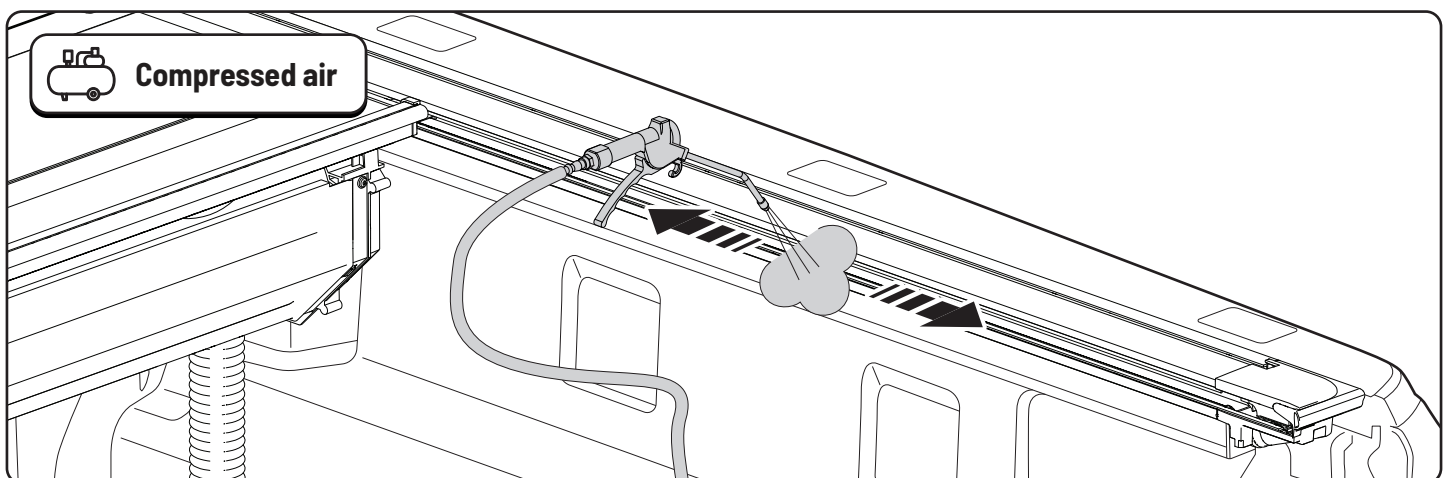


- Clean the side profiles.

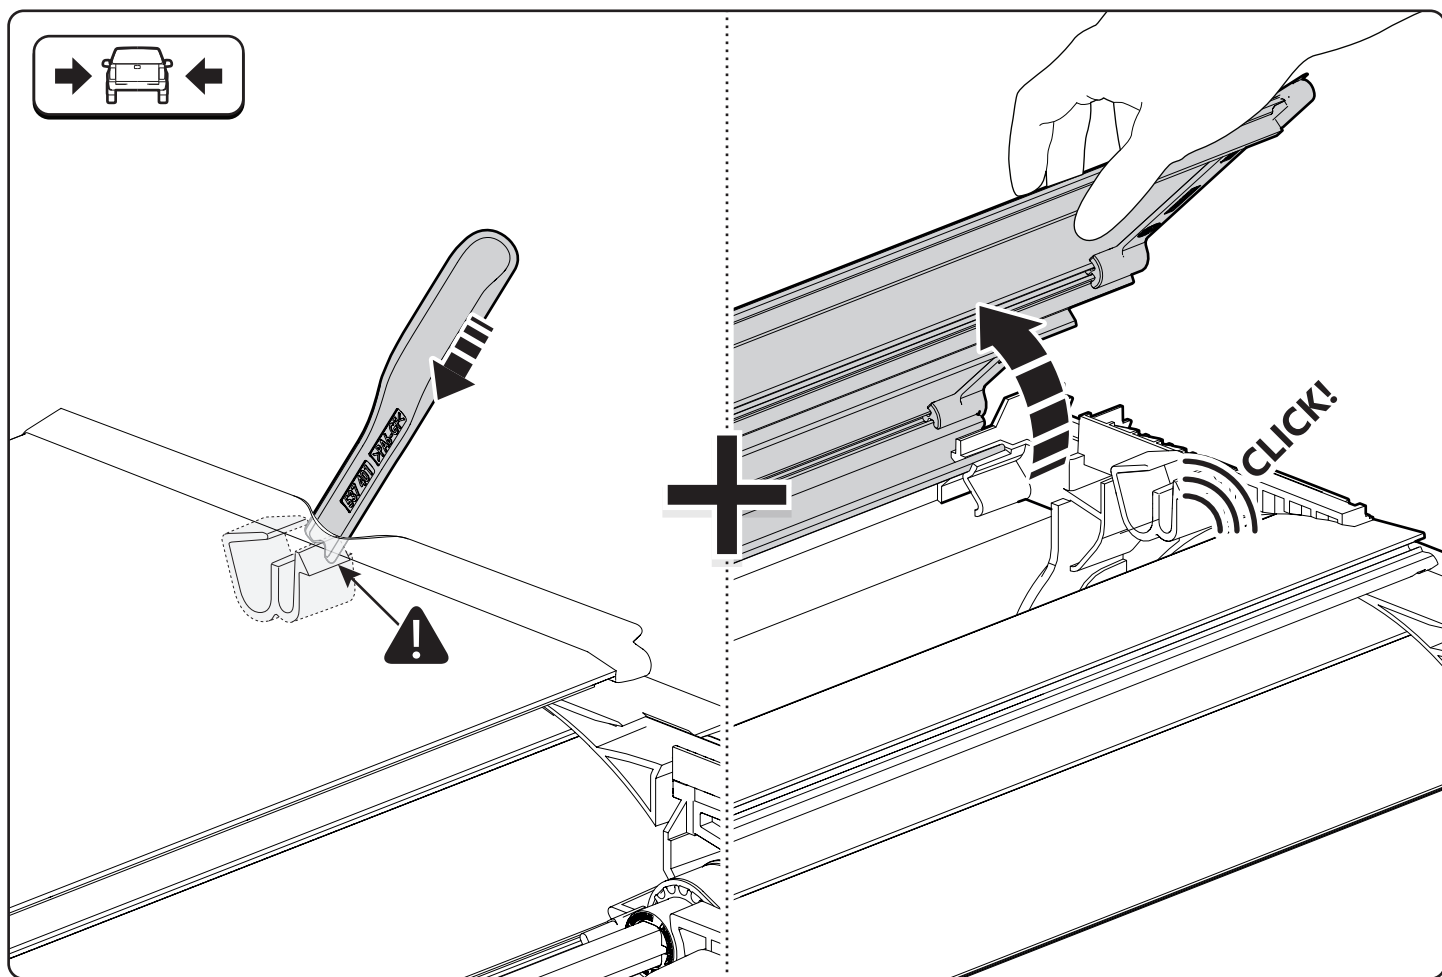


- Open the canister.

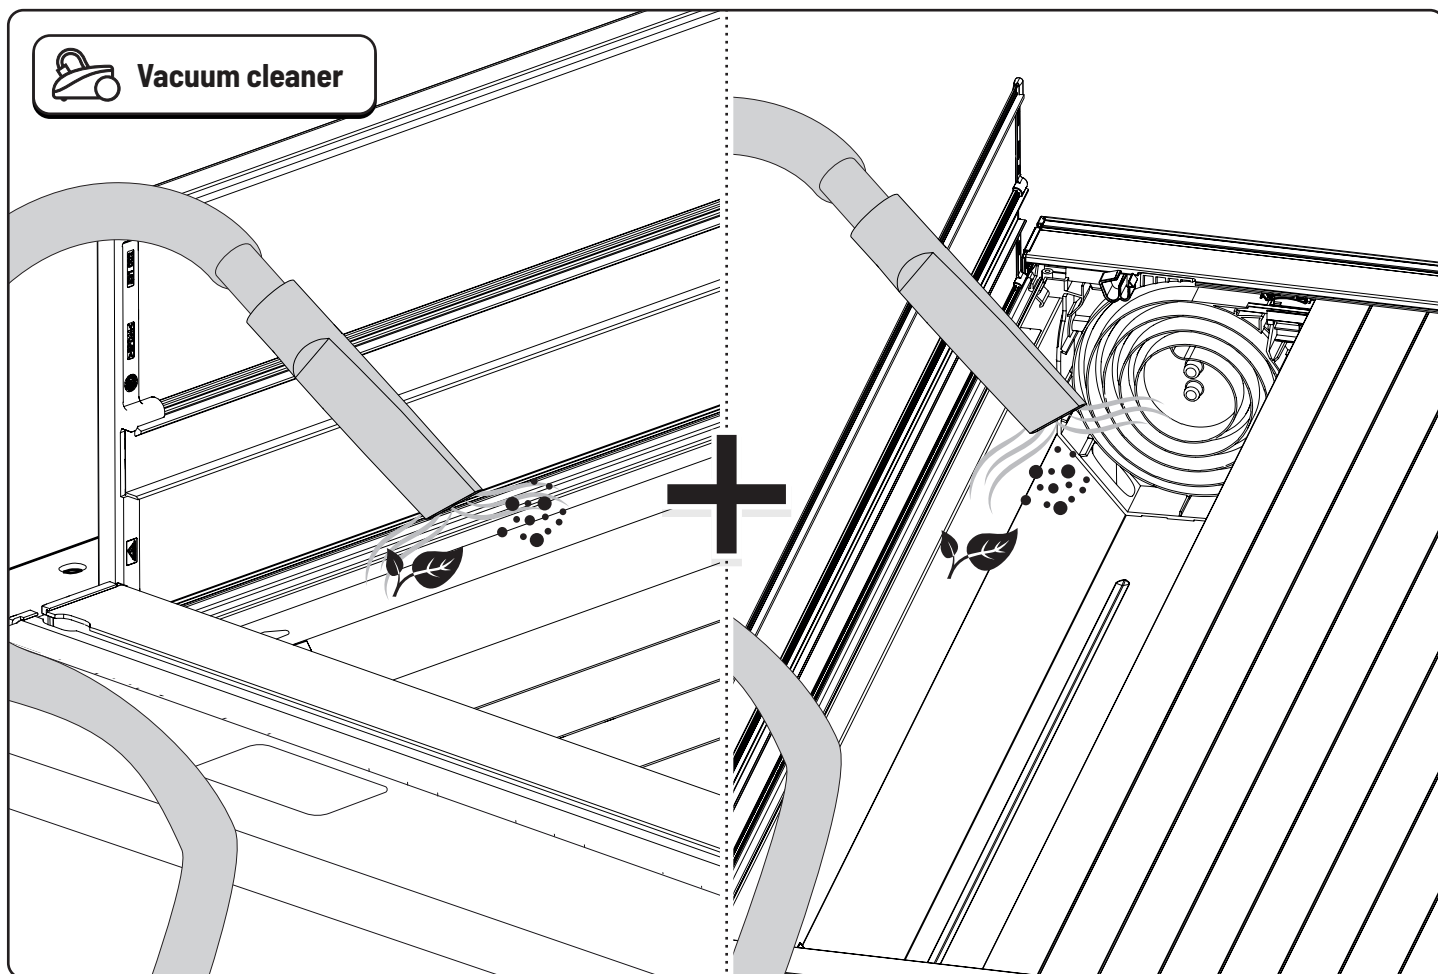


- Clean the canister.

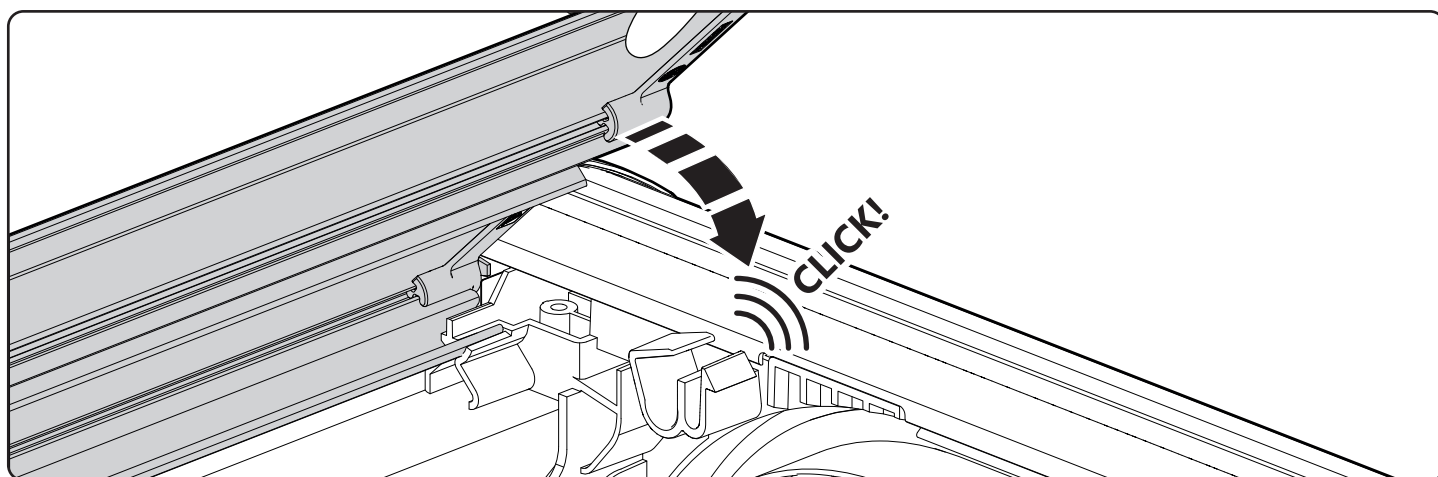


- Close the canister.

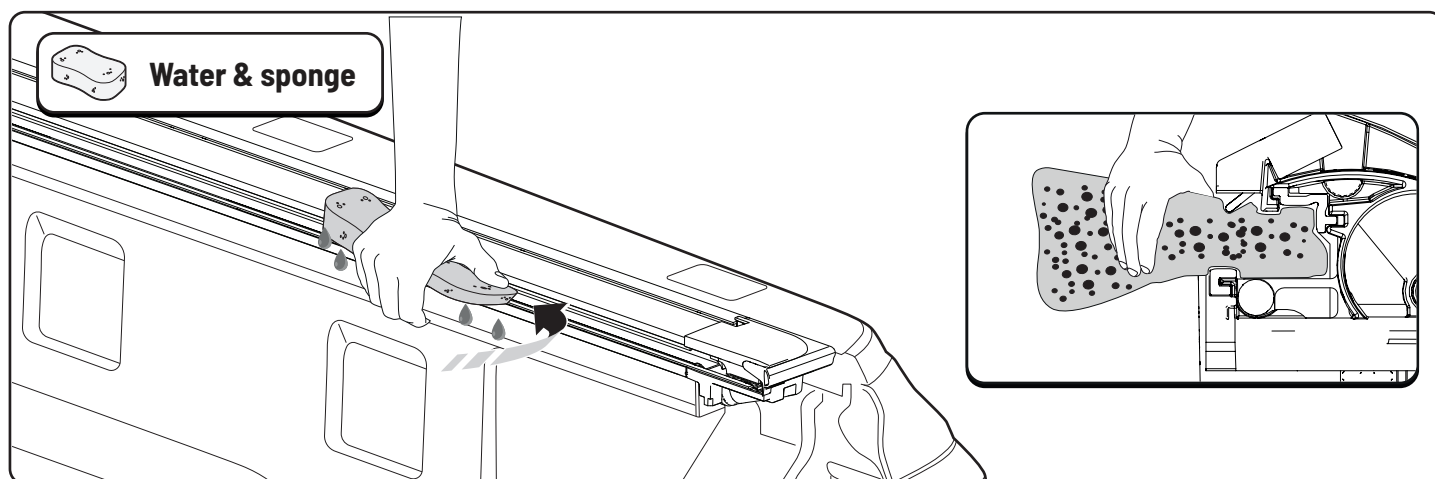


- Clean the drainage channels on the side profiles.

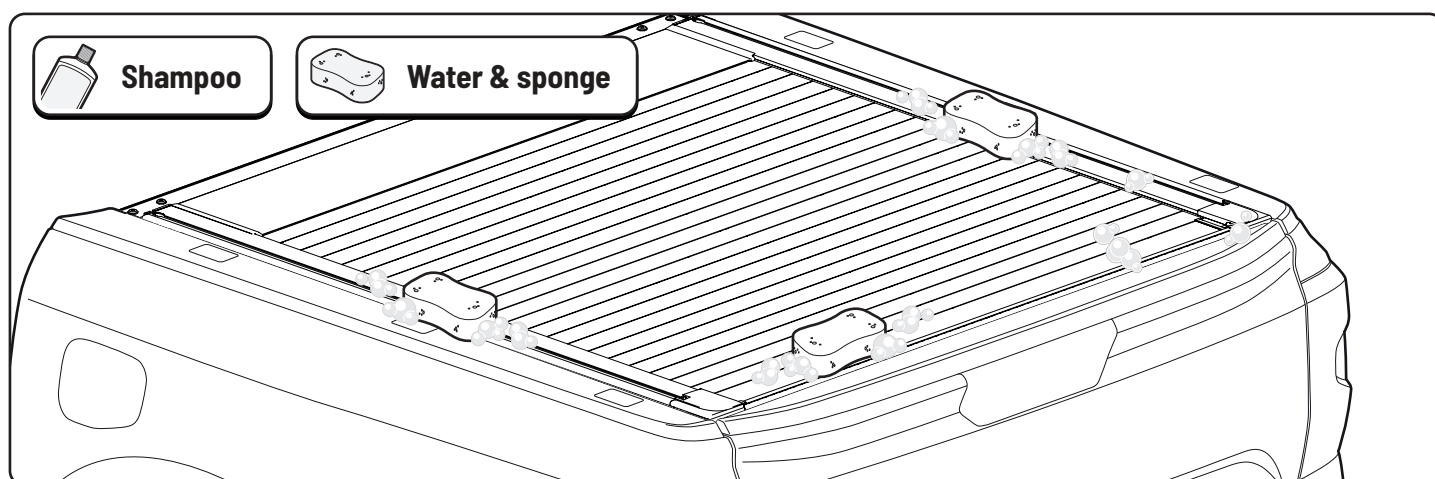

- The EVO roll cover should be cleaned regularly.

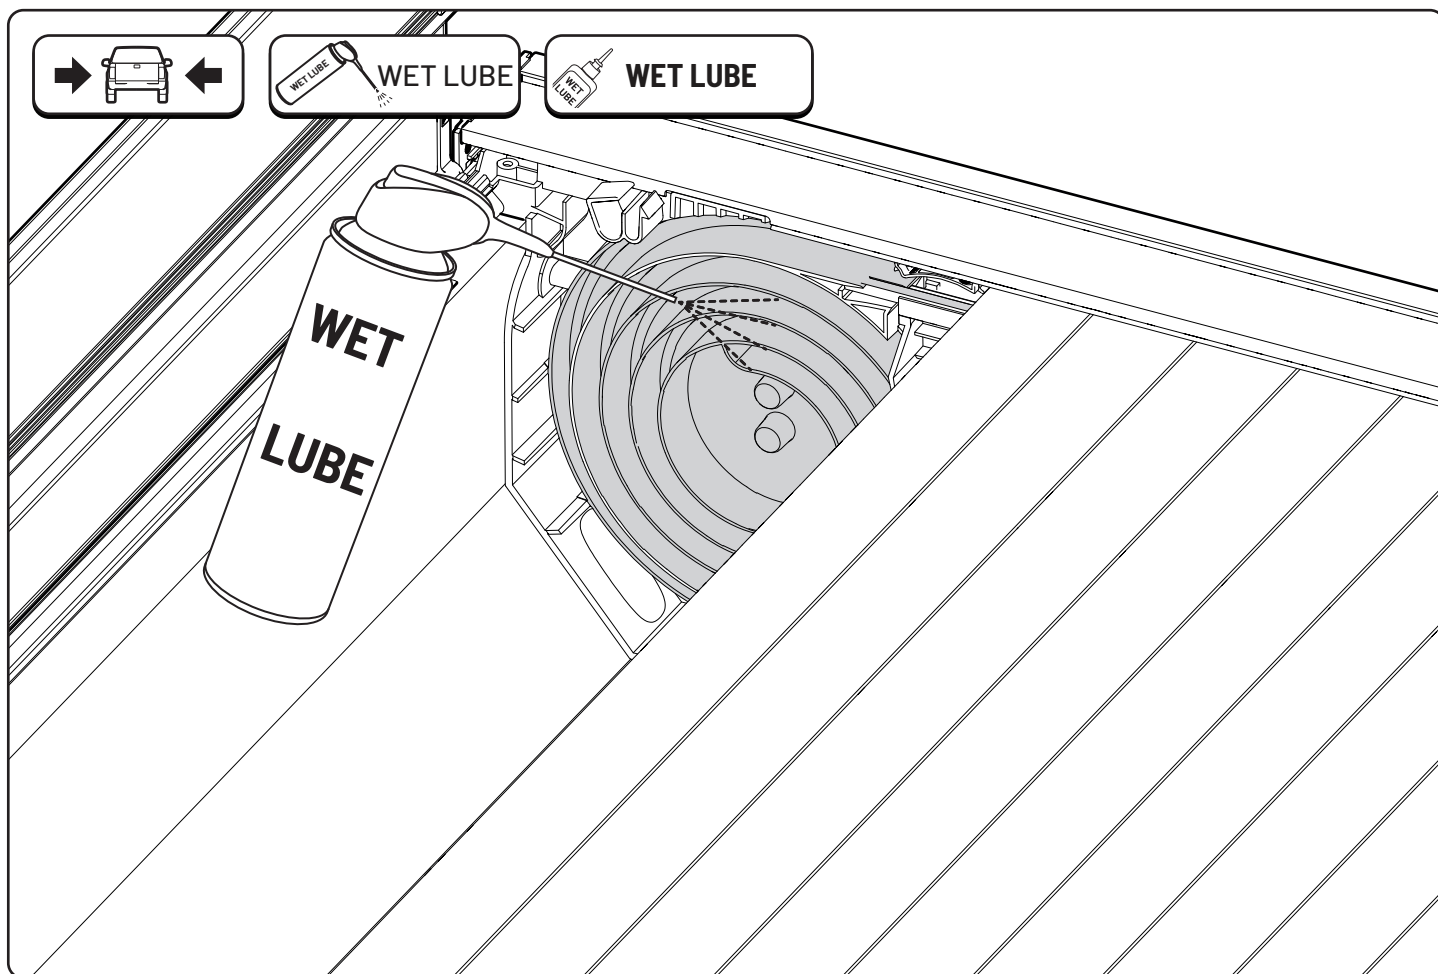


- Regularly, and following cleaning, apply a PTFE-free all-conditions wet lube product to the inside of the canister ends.

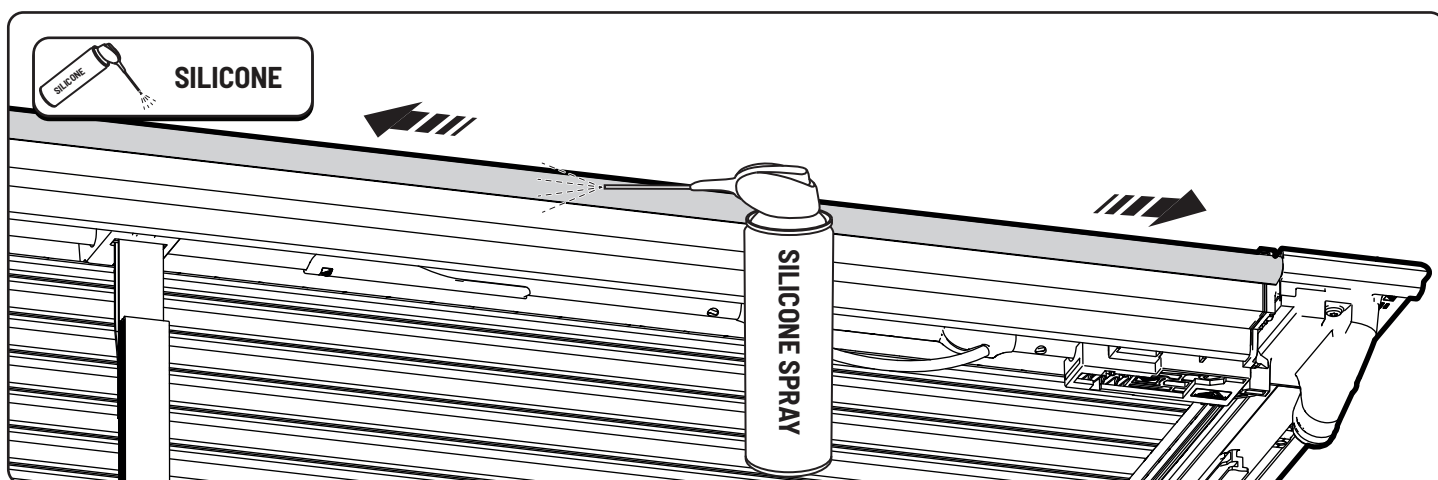


## 4


### CHECK GLIDE RAILS MAINTENANCE

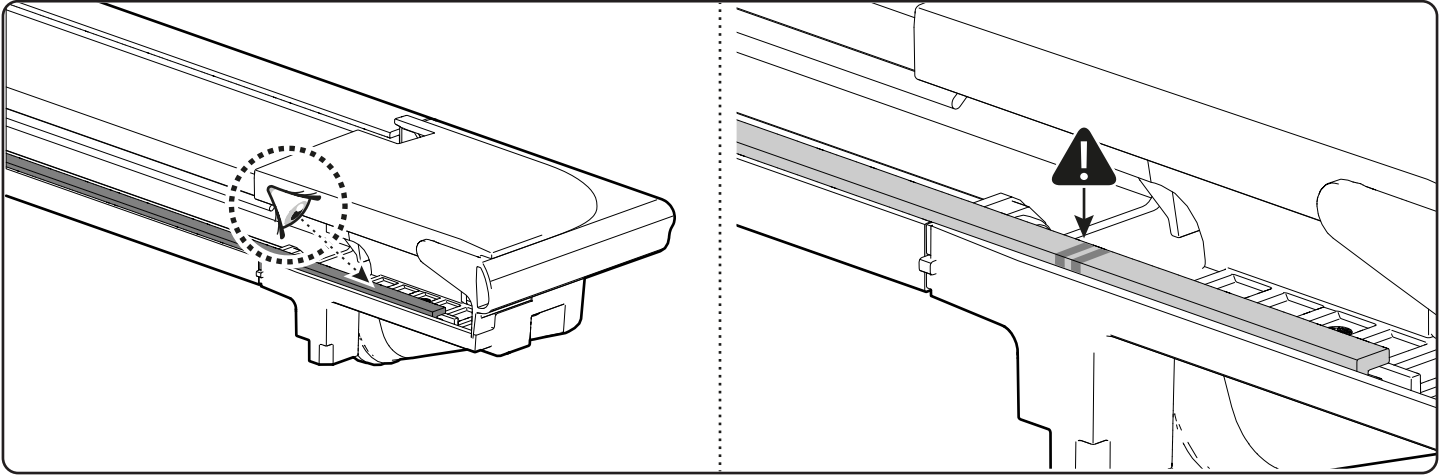


- If abnormal sounds occur during operation of the roll cover, inspect the glide rails for debris or damage. If the glide rails are damaged or worn, then replacement glide rails are needed.

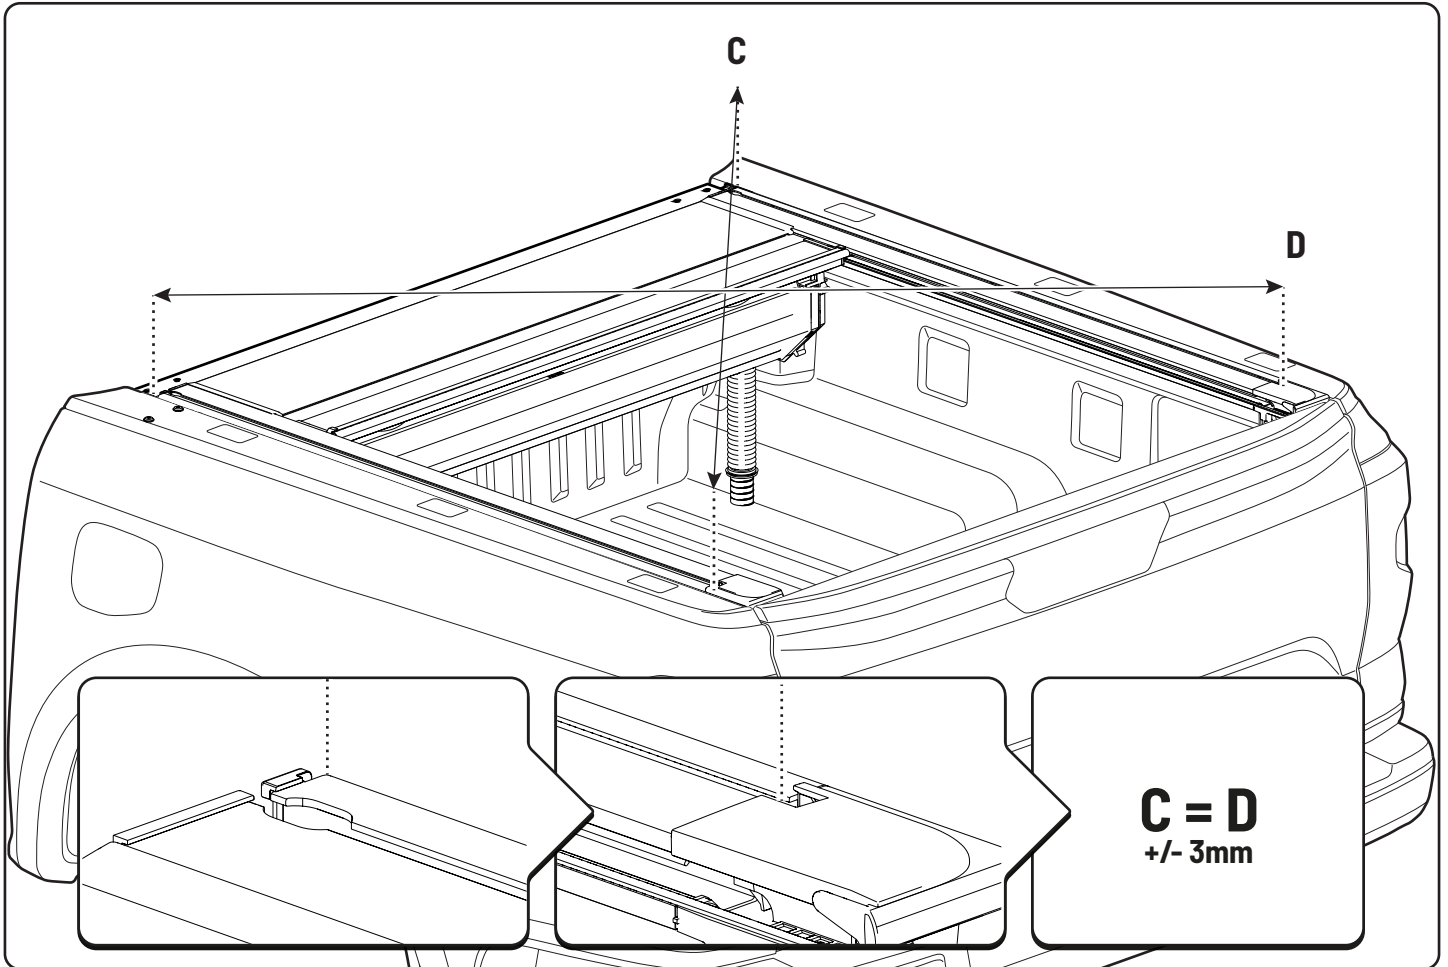

- Ensure the cross measurements are identical.

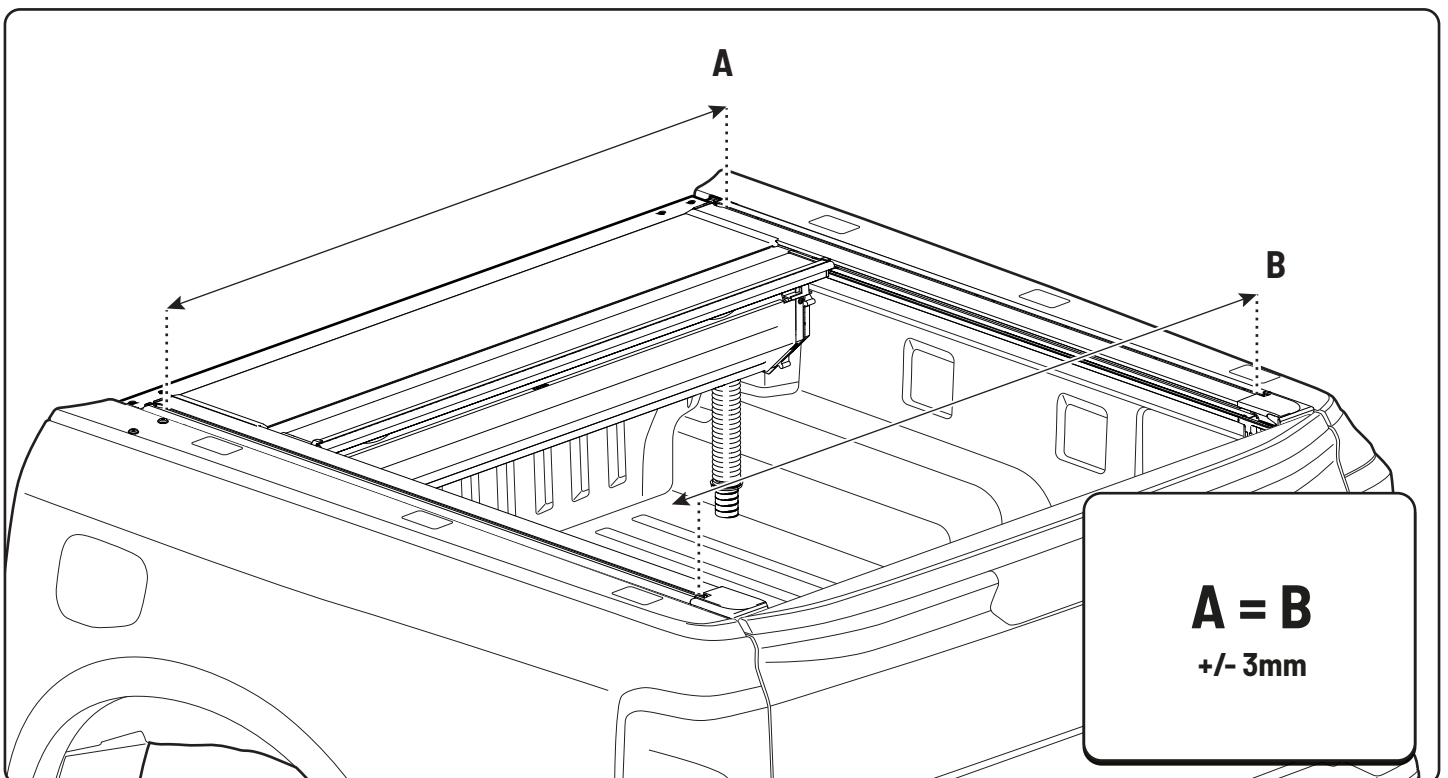

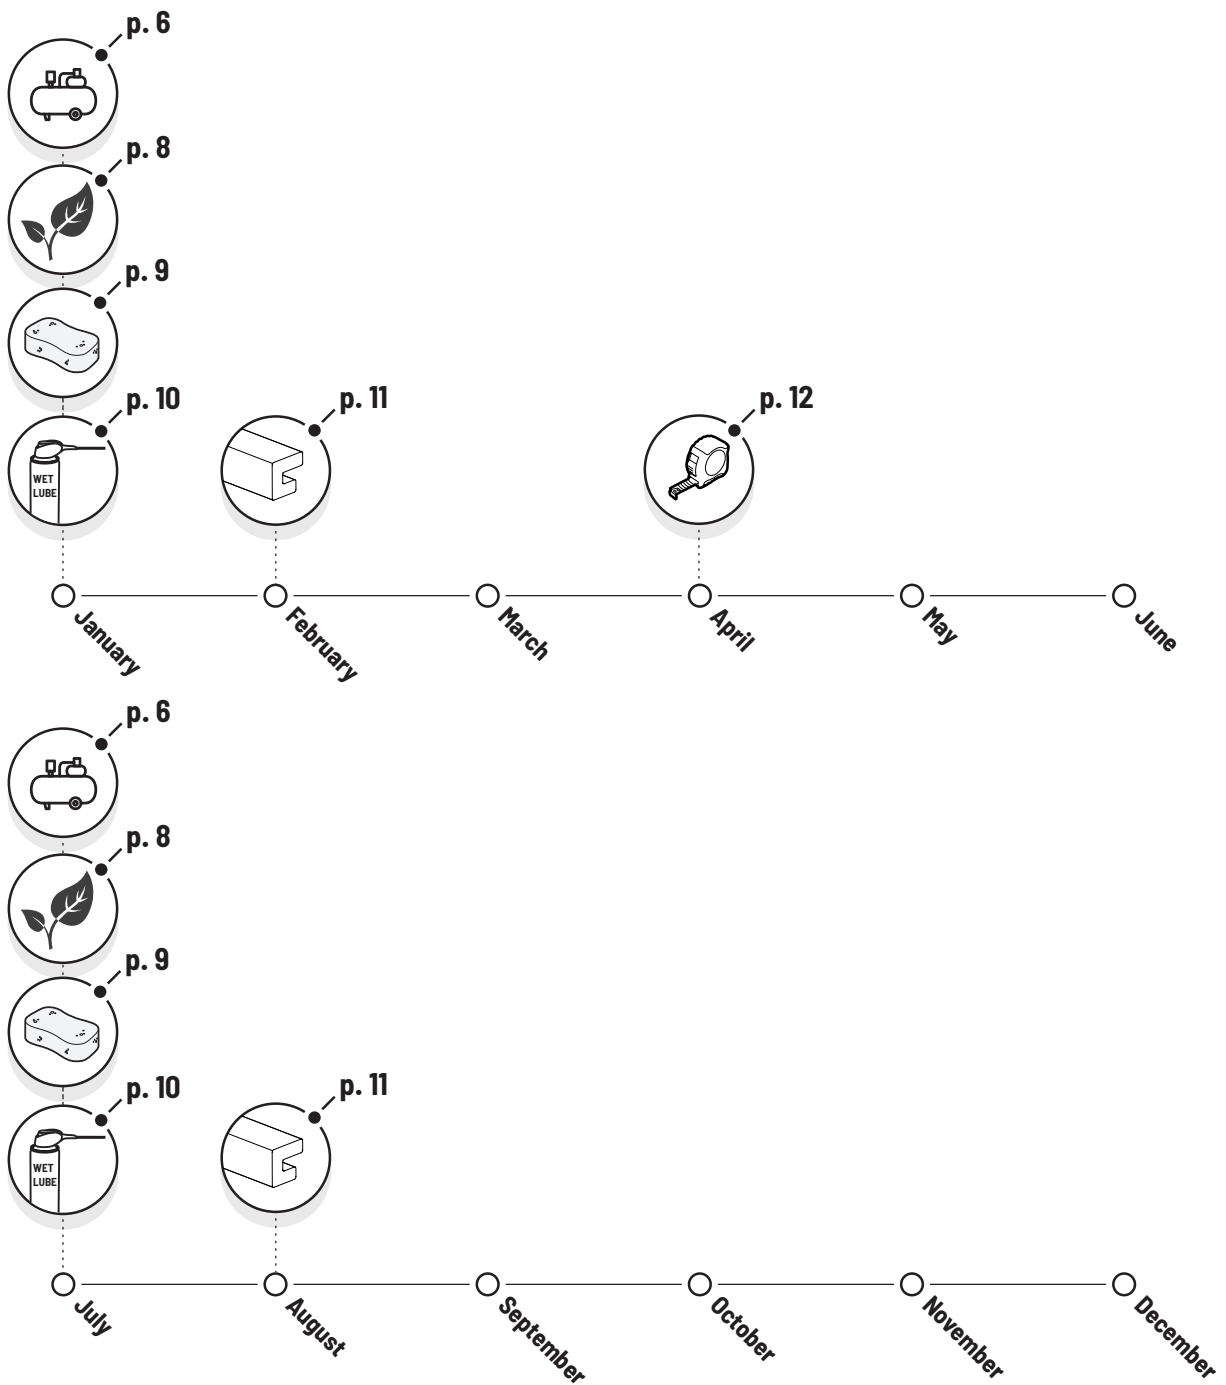



| Recommended part change | Km      | Years |
|-------------------------|---------|-------|
| Side profiles           | 100.000 | 3     |
| Rear profiles           | 200.000 | 5     |

- Maintenance requirements and frequency depend on the actual usage of the roll cover and the environments and elements that it is exposed to.
- Clean and lubricate the cover accordingly to ensure the best possible operation and function.



| Type of Maintenance | Date | Done by |
|---------------------|------|---------|
|                     |      |         |
|                     |      |         |
|                     |      |         |
|                     |      |         |
|                     |      |         |
|                     |      |         |
|                     |      |         |

## ACCESSORIES

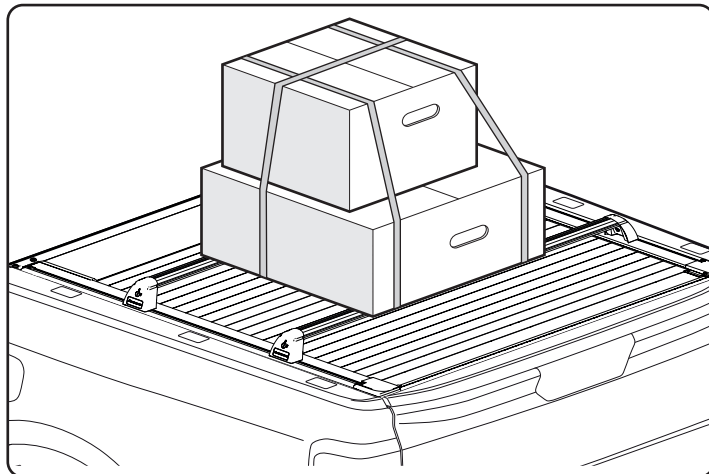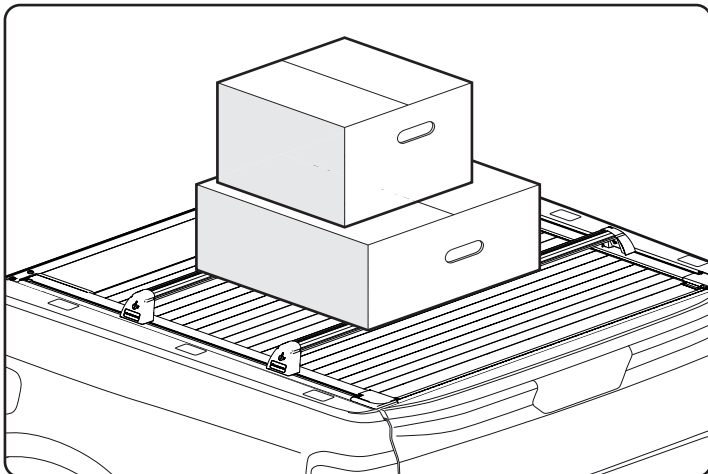

- Mountain Top Cargo Carrier combined load capacity of 45 Kg.
- See more accessories and spareparts [www.mountaintop.dk](http://www.mountaintop.dk).



|                  |                                                  |
|------------------|--------------------------------------------------|
| Customer Service | +45 4810 2950 (08:00 - 16:00 CET)                |
| Support          | info@mountaintop.dk                              |
| Website          | www.mountaintop.dk                               |
| Address          | Pedersholmparken 10, 3600 Frederikssund, Denmark |



Scan for more  
information